

06:28

09:28

13:28

14:28

17:28

TOKYO

PACIFIC

GMT

LONDON

EASTERN

### SPECIFICATIONS

## EBTZ-42425-5

TYPE: ----- DIGITAL

DISPLAY: ----- 4-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED

CHARACTER HEIGHT: ----- 2.5" (63.5 mm) HR./MIN.

VISIBILITY: ----- 150 Ft. (45.72 METERS)

POWER REQUIREMENTS: 100-240vac 50/60Hz (12vdc Switching Power Supply)

FRAME: ----- ALUMINUM (BLACK ANODIZED FINISH)

DIMENSIONS: ----- 7.125 x 70.125 x 1.375

WEIGHT: ----- 9.5 lbs. NO TRANSFORMER

OPERATING TEMP.: ----- -17° TO 190° F

HUMIDITY: ----- 0% TO 95% NON-CONDENSING

OPERATING MODE: ----- SYNCHRONIZED ZONES WITH ONE MASTER SET ZONE.

**NEW 1 SEC A YEAR ACCURATE (TCXO)**


ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL TO GET THE ONE SEC A YEAR ACCURACY.



CLOCK BACK

- 31 TIME ZONES
- 27 DAYLIGHT SELECTS

1.8", 2.5" and 4" DIGIT SIZE  
 12 OR 24 HOUR FORMAT  
 2 TO 24 ZONES  
 NON GLARE LENS  
 SUPER BRIGHT LEDS  
 CUSTOM LETTERING TO YOUR SPECIFICATION  
 ALUMINUM FRAME SURFACE MOUNT OR FLUSH  
 10 YEAR LITHIUM BATTERY BACKUP (Standard)  
 AUTOMATIC DAY LIGHT CORRECTION (Standard)  
 INFRARED REMOTE CONTROL (Standard)  
 ONE SEC A YEAR ACCURACY (TCXO) (Standard)

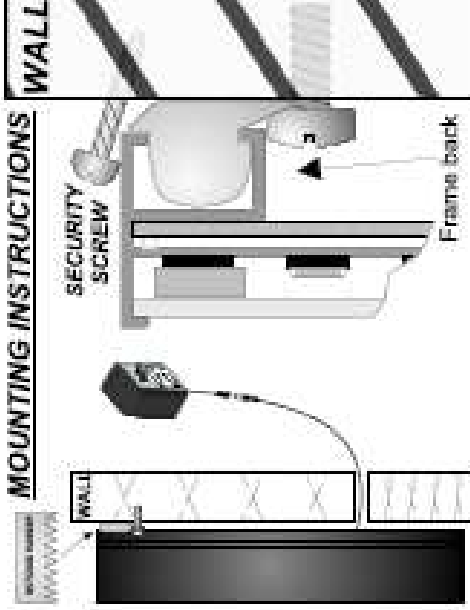

MOUNTING INSTRUCTIONS

SECURITY SCREW

Frame back

