EBTZ-42425-6-E

SPECIFICATIONS

TYPE: ---------- DIGITAL and 15 CHARACTER ALPHANUMERIC IN ***(RED, GREEN, YELLOW and BLUE)***
DISPLAY: ---------- 4-DIGIT, 7 seg. LED and 15 LINE 5 by 7 DOT- MATRIX RED LED'S
CHARACTER HEIGHT: -------- 2.5" (63.5mm) HR / MIN 1.2" (30.48mm) ***15 Character location display***
VISIBILITY: ---------- 85 Ft. (25.90 METERS)
POWER REQUIREMENTS: -- 100-240V 1.5A 47~63 Hz ***(12vdc SWITCHING POWER SUPPLY).***
FRAME: ---------- ALUMINUM (BLACK ANODIZED FINISH OR SILVER)
DIMENSIONS: ---------- 10.25" x 85.25" x 1.38"
WEIGHT: ---------- 21.25 lbs.
OPERATING TEMP.: ---------- -17° TO 190° F
HUMIDITY: ---------- 0% TO 95% NON-CONDENSING
OPERATING MODE: ---------- 12 or 24 HR SELECTABLE and AUTOMATIC DAY LIGHTS.

ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY.

NEW 1 SEC A YEAR ACCURATE (TCXO) STANDARD

THE PC IS USED TO SET THE LOCATION DISPLAY AND TIME. THE CLOCK CAN RUN ON ITS ON WITHOUT THE PC.

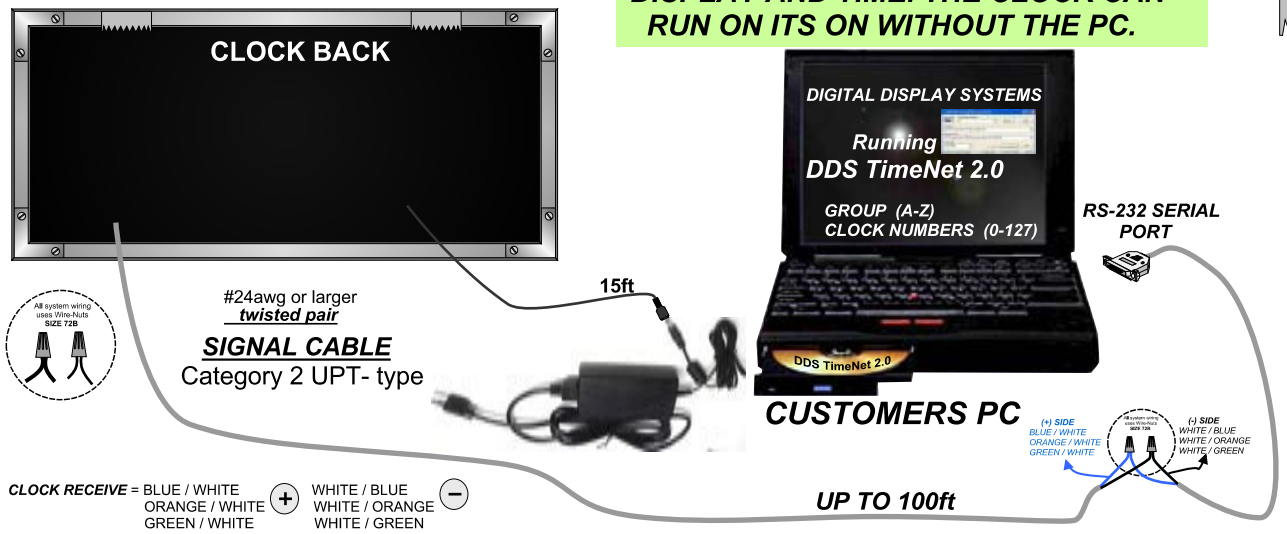
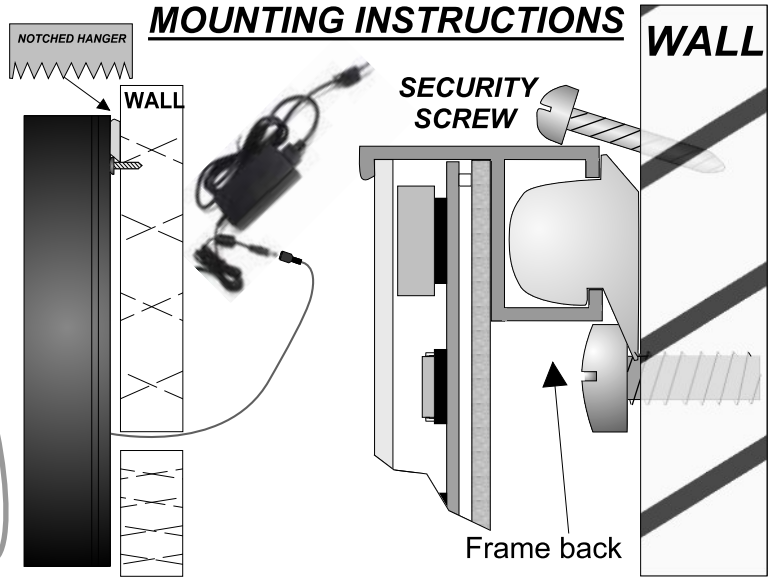
MOUNTING INSTRUCTIONS